


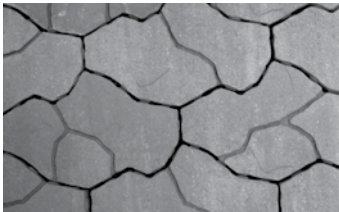


INTERLOCKING CONCRETE PAVEMENT SYSTEM (ICP)

DURABLE FLEXIBLE PAVEMENT SYSTEM

STYLE		CODE	DIMENSIONS	CUBES
Old Munich 70mm Thickness <i>Note: Use protective plate during compaction.</i>		40M	355mm x 558mm x 70mm Approximate 13 ⁷ / ₈ " x 21 ⁷ / ₈ " x 23 ¹ / ₄ " - Returns of full cubes only - NOT SOLD BY THE BAND There are 7 layers per cube at 11.10 SF per layer. - Sizes are all the same, the dummy groove creates the look of various sizes.	77.7 SF 2525#

COMPOSITION & MANUFACTURE

Typical Cross Section of Concrete Paving Stone

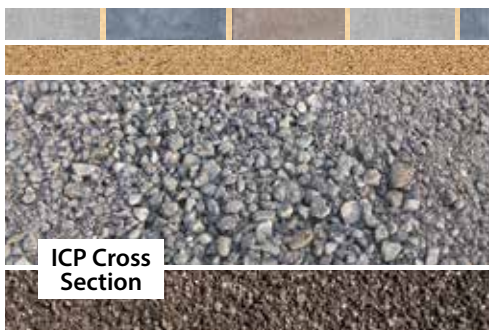

Edge restraint detail provided based on application.

- ▶ **Borgert Pavers**
- ▶ **Bedding Sand 1" Thick (ASTM C33)**
- ▶ **Compacted Aggregate Base Class 2 or Class 5**
(Thickness depends on soil condition and application)
Prior to screeding the bedding sand, the base surface tolerance must not exceed +/-1/4 in.(+/-6mm) over a 10gt. (3m) straight edge.
- ▶ **Compacted Soil Subgrade**

- Pavers exceed industry standards: 8,000 psi - 5% absorption
- Meets or exceeds ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67
- Manufactured with type A aggregates
- Associated with a range of LEED credits
- ADA Compliant

Written detailed specification information is available, call or visit our website at borgertproducts.com.

BENEFITS OF ICP

- Flexible system, does not crack or heave in cold climates
- Easier maintenance to the pavement and utilities underneath
- Achieve endless design possibilities with different shapes, textures, colors and laying patterns
- Use slabs to delineate lines and spaces to eliminate the need to maintain paint
- Suitable for plazas and walkways. Not recommended for vehicular applications
- Borgert slabs are made with granite, creating a dense, resistant wearing course