
PANOMUR® WALL



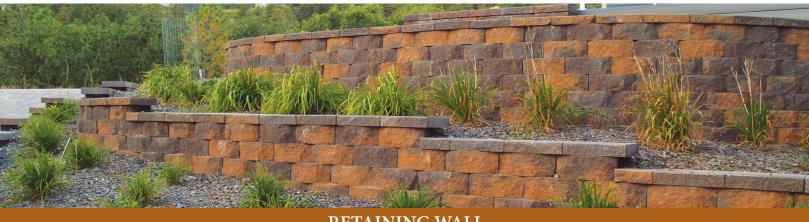



RETAINING WALL

ITEM	CODE	DIMENSIONS	WEIGHT PER UNIT	UNITS PER PALLET	WEIGHT PER PALLET
PanoMur Wall 6" Curved Split Face	8PW	6"H x 16"W x 12"D	49#	45	2205#
PanoMur Wall 6" Straight Split Face	8PWS	6"H x 16"W x 12"D	49#	45	2205#
PanoMur Caps - Split	8PC	3"H x 16"W x 12"D	47#	60	2850#
PanoMur Corner Units	8PQ	6"H x 16"W x 8"D	60#	36	2160#

Core fill with crushed aggregate. To figure quantity: Sq.Ft. of wall \div .67 = number of units needed.

INSIDE & OUTSIDE CORNER DETAILS



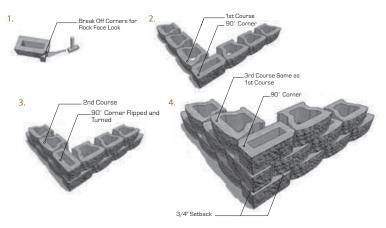


Note: PanoMur® has a 6° batter




PANOMUR® WALL



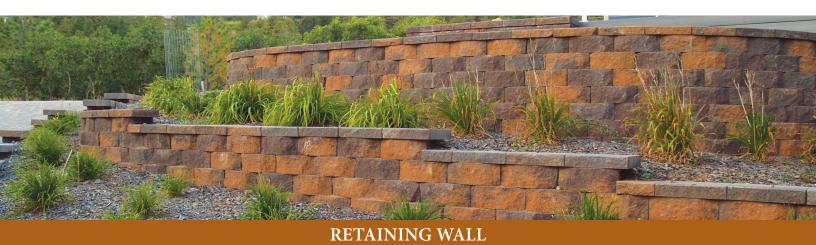

OUTSIDE CURVES

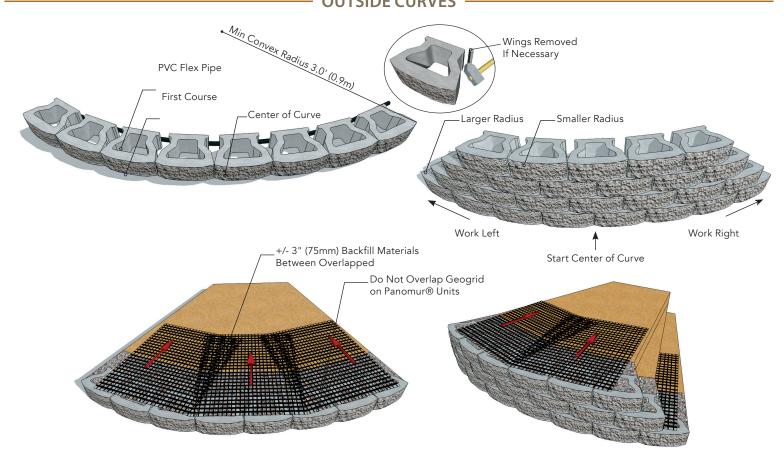

SMALLEST CIRCLE DIMENSIONS



Standard PanoMur® Full Unit Circle

15 Units Total

Diameter

6½ ft outside diameter

41/2 ft inside diameter

<u>Radius</u>

31/4 ft outside radius

2¼ ft inside radius

These measurements are nominal



PanoMur® Unit Circle with Handhelds Removed

12 Units Total

Diameter

5½ ft outside diameter

31/2 ft inside diameter

Radius

2¾ ft outside radius

1¾ ft inside radius

These measurements are nominal